# **Blade Type Caliper**

#### SERIES 573, 536 — ABSOLUTE Digimatic and vernier type

#### **FEATURES**

- The thin blade-type jaws fit into very small grooves and make previously difficult outside measurements far easier to obtain.
- With depth bar.
- SPC data output (Series 573).
- The outside measuring faces are carbidetipped.



Inch/Metric

Range

0 - 6'

Digital model Order No.

573-734

Accuracy

±.001"

## D

### **SPECIFICATIONS**


Metric	tric Digital model		
Range	Order No.	Accuracy	
0 - 150mm	573-634	±0.02mm	
0 - 150mm	573-635*	±0.02mm	

\*without thumb roller

#### Metric

Range	Order No.	Accuracy
0 - 150mm	536-134	±0.05mm
0 - 200mm	536-135	±0.05mm
0 - 300mm	536-136	±0.08mm

#### DIMENSIONS

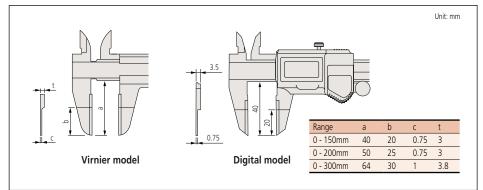

#### ABSC Absolute System Patented by MITUTOYO

(Refer to page VIII for details.)





#### **Technical Data**

Accuracy: Refer to the list of specifications. (excluding quantizing error for digital models) Resolution\*: 0.01mm or .0005"/0.01mm Graduation\*\*: 0.05mm Display\*: LCD Scale type\*: ABSOLUTE electromagnetic linear encoder Max. response speed\*: Unlimited Battery\*: SR44 (1 pc.), **938882** Battery life\*: Approx. 3 years under normal use Dust/Water protection level\*: IP67 \*Digital models \*\*Analog models

#### **Functions of Digital Model**

Origin-set, Zero-setting, Automatic power on/off, Data output, inch/mm conversion (inch/mm models) Low voltage, Counting value composition error Alarm:

#### **Optional Accessories for Digital Model**

**05CZA624**: SPC cable with data switch (1m) **05CZA625**: SPC cable with data switch (2m) 02AZD790A: SPC cable for U-WAVE w/ data switch (160mm)



