



(Refer to page VIII for details.)



(Refer to page VIII for details.)

## Technical Data

Accuracy: Refer to the list of specifications.  
(excluding quantizing error for digital models)  
Resolution\*: 0.01mm or .0005"/0.01mm  
Graduation\*\*: 0.05mm  
Display\*: LCD  
Scale type\*: ABSOLUTE electromagnetic linear encoder  
Max. response speed\*: Unlimited  
Battery\*: SR44 (1 pc.), **938882**  
Battery life\*: Approx. 3 years under normal use  
Dust/Water protection level\*: IP67  
\*Digital models \*\*Analog models

## Functions of Digital Model

Origin-set, Zero-setting, Automatic power on/off, Data output, inch/mm conversion (inch/mm models)  
Alarm: Low voltage, Counting value composition error

## Optional Accessories for Digital Model

**05CZA624**: SPC cable with data switch (1m)  
**05CZA625**: SPC cable with data switch (2m)  
**02AZD790A**: SPC cable for U-WAVE w/ data switch (160mm)




# Point Caliper


**SERIES 573, 536 — ABSOLUTE Digimatic and vernier type**

## FEATURES

- Narrow-tip jaws fit into very small grooves and tracks, making many previously difficult outside measurements far easier to obtain.
- With depth bar.
- SPC data output (Series 573).

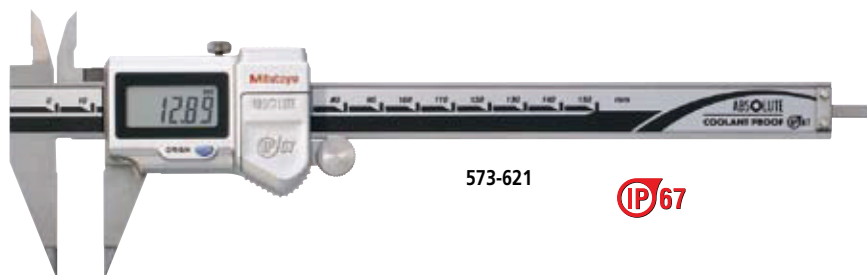

573-621

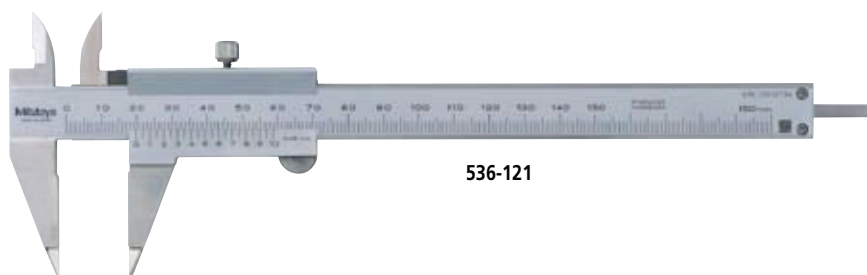

536-121

## SPECIFICATIONS

Metric Digital model		
Range	Order No.	Accuracy
0 - 150mm	<b>573-621</b>	±0.02mm
0 - 150mm	<b>573-625</b>	±0.02mm
0 - 150mm	<b>573-622*</b>	±0.02mm
0 - 150mm	<b>573-626*</b>	±0.02mm

\*without thumb roller

Metric		
Range	Order No.	Accuracy
0 - 150mm	<b>536-121</b>	±0.05mm

Inch/Metric Digital model		
Range	Order No.	Accuracy
0 - 6"	<b>573-721</b>	±.001"
0 - 6"	<b>573-725</b>	±.001"

## DIMENSIONS

