

Tube Thickness Caliper


SERIES 573, 536 — ABSOLUTE Digimatic and vernier type

FEATURES

- The beam-mounted jaw is a round bar that facilitates measurements of tube wall thickness.
- SPC data output (Series 573).



573-661

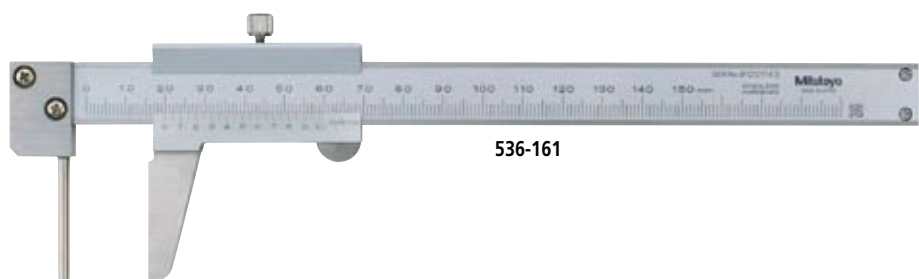

536-161

SPECIFICATIONS


Metric Digital model		
Range	Order No.	Accuracy
0 - 150mm	573-661	±0.05mm
0 - 150mm	573-662*	±0.05mm

*without thumb roller

Metric		
Range	Order No.	Accuracy
0 - 150mm	536-161	±0.05mm

Inch/Metric Digital model		
Range	Order No.	Accuracy
0 - 6"	573-761	±.002"

DIMENSIONS

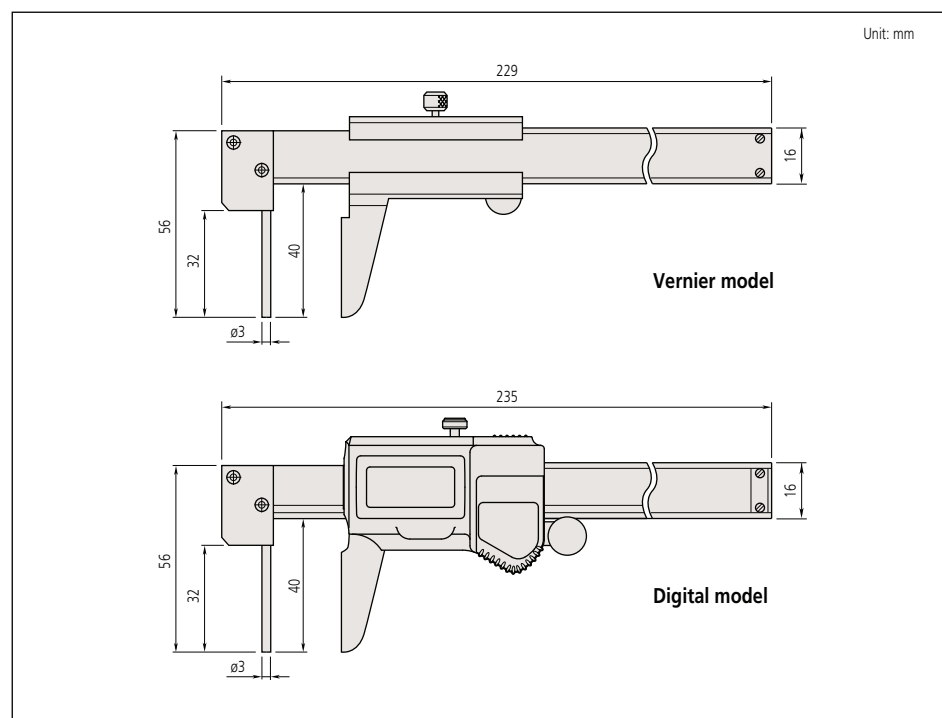

Vernier model

Digital model



(Refer to page VIII for details.)



(Refer to page VIII for details.)

Technical Data

Accuracy: Refer to the list of specifications.
(excluding quantizing error for digital models)
Resolution*: 0.01mm or .0005"/0.01mm
Graduation**: 0.05mm
Display*: LCD
Scale type*: ABSOLUTE electromagnetic linear encoder
Max. response speed*: Unlimited
Battery*: SR44 (1 pc.), **938882**
Battery life*: Approx. 3 years under normal use
Dust/Water protection level*: IP67
*Digital models **Analog models

Functions of Digital Model

Origin-set, Zero-setting, Automatic power on/off, Data output, inch/mm conversion (inch/mm models)
Alarm: Low voltage, Counting value composition error

Optional Accessories for Digital Model

05CZA624: SPC cable with data switch (1m)
05CZA625: SPC cable with data switch (2m)
02AZD790A: SPC cable for U-WAVE w/ data switch (160mm)

